

















# LINSY 林氏家居

## Assembly Instruction

Model No.	LS075SF1
Specification	Single Sofa+Legs Rest
Material	Wood+metal frame+doll cotton+Fabric
Date	2023/3/31

Hardware list				Component list			
No.	Name	Picture	QTY	No.	Name	Picture	QTY
A	Screw M8*50mm		4	1	Front bar		1
B	Screw M8*30mm		2	2	Rear bar		1
C	φ19 washer		6	3	"7" shape frame(left)		1
D	Wrench		1	4	"7" shape frame(right)		1
E	Wood plug		2	5	Cushion		1
F	Inner thread		4	6	Foot rest		1
G	Foot pad		8	7			
H	Corner code		2	8			

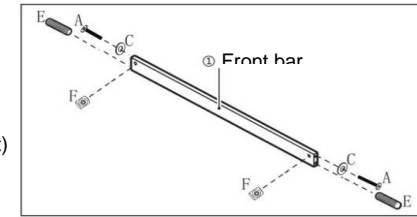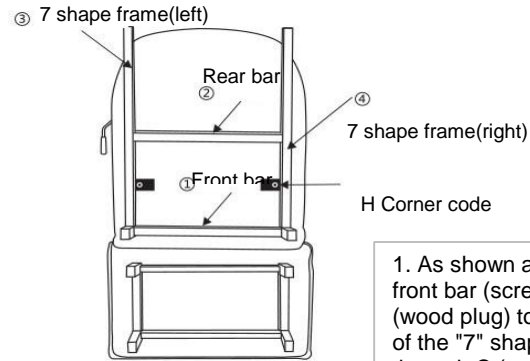

1. As shown above, first bury F (Inner thread) in the side hole of the front bar (screw hole is connected to the hole of the front bar), use E (wood plug) to make a preliminary connection to front bar and one end of the "7" shape frame, align the hole position, and pass A (screw) through C (washer) Insert into the hole where F (Inner thread) is just installed and twist with a wrench,tighten firmly. Fix the other end in the same way.

2. Embed F (Inner thread) into the side hole of the rear bar (screw hole is connected to the hole of the rear bar), align the hole position, pass A (screw) through C (washer) Insert it into the hole where F (Inner thread) is installed, and tighten it with a wrench.

3. Finally, align the left and right corner hole positions with the sofa hole position, pass B (Short screw) through C (washer), insert it into the hole and tighten it with a wrench.

